

COMPRESSORS RACKS
ENERFROST


Ener Frost® is the multicompressor racks series equipped with 2, 3 or 4 compressors, two of which are regulated by two vector inverters independently

Some features, minimum liquid level monitoring with alarm, compressors support floating frame, high pressure switch on each compressor; low pressure switch and intervention of inverter of the compressors in the event of an electronic failure

Electrical panel complete with magneto-thermal and differentials for compressor, compressor headers fan and crankcase heater, double safety transformer for auxiliaries, programmable controller

Enerfrost Units can be equipped with the following accessories:

- Partial or total heat recovery.
- Hot gas defrost direct or with reverse cycle
- EC fans
- Electronic remote monitoring or managment or WRC remote control

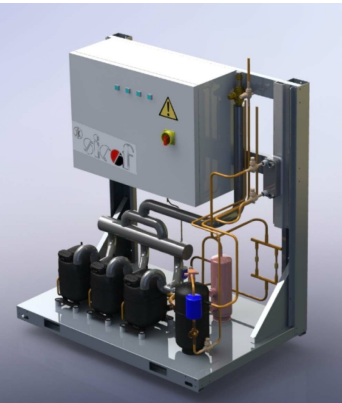

TN -5°C/-15°C

| DATI TECNICI TECHNICAL DATA TECHNICAL DATA | | | CS22NQ3RT0580E2 | |
|---|---|---------|-----------------|------|
| Unità Unit Unit | Tensione Voltage Voltage | volt/Hz | 400/3+N/50HZ | |
| | Assorbimento Absorption Absorption | W | 4300 | |
| | | A | 15 | |
| | Compressore Compressor Kompressor | model | NJ9238GS | |
| | | cc | 64 | |
| | Comp. con inverter. Inverter Comp. Inverter Comp. | n° | 2 | |
| Condensazione Condensation Condensation | Refrigerante Coolant Coolant | | R452A | |
| | Tipo cond. Cond. type Cond. type | | remoto | |
| Dimensioni Sizes Sizes | Diam. tubo liq. Liq. line diam. Liq. line diam. | mm | 12 | |
| | Diam. tubo asp. Suct. line diam. Suct. line diam. | mm | 12 | |
| | Diam. uscita cond. Cond. inlet diam. Cond. inlet diam. | mm | 12 | |
| | Diam. ritorno cond. Cond. return diam. Cond. return diam. | mm | 12 | |
| | Larghezza Width Width | mm | 950 | |
| | Profondità Depth Depth | mm | 600 | |
| | Altezza Height Height | mm | 800 | |
| | Peso Weight Weight | kg | | |
| TABELLA DI SELEZIONE SELECTION TABLE AUSWAHLTABELLE | | | MIN | MAX |
| TC -5°C | | W | 1477 | 7087 |
| TC -10°C | | W | 1233 | 5918 |
| TC -15°C | | W | 1009 | 4843 |