

## COMPRESSORS RACKS

### ENERFROST

Ener Frost® is the multicompressor racks series equipped with 2, 3 or 4 compressors, two of which are regulated by two vector inverters independently

Some features, minimum liquid level monitoring with alarm, compressors support floating frame, high pressure switch on each compressor; low pressure switch and intervention of inverter of the compressors in the event of an electronic failure

Electrical panel complete with magneto-thermal and differentials for compressor, compressor headers fan and crankcase heater, double safety transformer for auxiliaries, programmable controller


Enerfrost Units can be equipped with the following accessories:

Partial or total heat recovery.

Hot gas defrost direct or with reverse cycle

EC fans

Electronic remote monitoring or management or WRC remote control

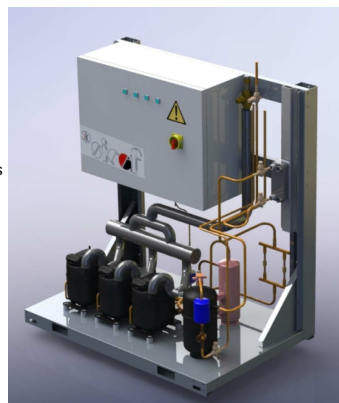

## TN -5°C/-15°C

#### DATI TECNICI | TECHNICAL DATA | TECHNICAL DATA

CS23NQ3RT0655E2

<b>Unità</b> <b>Unit</b> <b>Unit</b>	Tensione   Voltage   Voltage	volt/f/Hz	400/3+N/50HZ	
	Assorbimento   Absorption   Absorption	W	3600	
		A	11.5	
	Compressore   Compressor   Kompressor	model	NJ9232GS	
		cc	78	
	Comp. con inverter.   Inverter Comp.   Inverter Comp.	n°	2	
Refrigerante   Coolant   Coolant	R452A			
<b>Condensazione</b> <b>Condensation</b> <b>Condensation</b>	Tipo cond.   Cond. type   Cond. type	remoto		
<b>Dimensioni</b> <b>Sizes</b> <b>Sizes</b>	Diam. tubo liq.   Liq. line diam.   Liq. line diam.	mm	12	
	Diam. tubo asp.   Suct. line diam.   Suct. line diam.	mm	12	
	Diam. uscita cond.   Cond. inlet diam.   Cond. inlet diam.	mm	12	
	Diam. ritorno cond.   Cond. return diam.   Cond. return diam.	mm	12	
	Larghezza   Width   Width	mm	1200	
	Profondità   Depth   Depth	mm	790	
	Altezza   Height   Height	mm	1000	
	Peso   Weight   Weight	kg		

#### TABELLA DI SELEZIONE | SELECTION TABLE | AUSWAHLTABELLE

MIN

MAX

**TC -5°C**

W

1115

**7580**

**TC -10°C**

W

933

**6341**

**TC -15°C**

W

768

**5222**