

COMPRESSORS RACKS
ENERFROST


Ener Frost® is the multicompressor racks series equipped with 2, 3 or 4 compressors, two of which are regulated by two vector inverters independently

Some features, minimum liquid level monitoring with alarm, compressors support floating frame, high pressure switch on each compressor; low pressure switch and intervention of inverter of the compressors in the event of an electronic failure

Electrical panel complete with magneto-thermal and differentials for compressor, compressor headers fan and crankcase heater, double safety transformer for auxiliaries, programmable controller

Enerfrost Units can be equipped with the following accessories:

- Partial or total heat recovery.
- Hot gas defrost direct or with reverse cycle
- EC fans
- Electronic remote monitoring or managment or WRC remote control

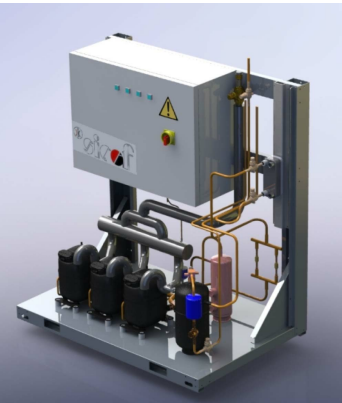

TN -5°C/-15°C

DATI TECNICI | TECHNICAL DATA | TECHNICAL DATA CS23NQ3RT0655E2

Unità Unit Unit	Tensione Voltage Voltage	volt/Hz	400/3+N/50HZ
	Assorbimento Absorption Absorption	W	3600
		A	11.5
	Compressore Compressor Kompressor	model	NJ9232GS
		cc	78
	Comp. con inverter. Inverter Comp. Inverter Comp.	n°	2
Condensazione Condensation Condensation	Refrigerante Coolant Coolant		R452A
	Tipo cond. Cond. type Cond. type		remoto
Dimensioni Sizes Sizes	Diam. tubo liq. Liq. line diam. Liq. line diam.	mm	12
	Diam. tubo asp. Suct. line diam. Suct. line diam.	mm	12
	Diam. uscita cond. Cond. inlet diam. Cond. inlet diam.	mm	12
	Diam. ritorno cond. Cond. return diam. Cond. return diam.	mm	12
	Larghezza Width Width	mm	1200
	Profondità Depth Depth	mm	790
	Altezza Height Height	mm	1000
	Peso Weight Weight	kg	

TABELLA DI SELEZIONE | SELECTION TABLE | AUSWAHLTABELLE MIN MAX

TC -5°C	W	1115	7580
TC -10°C	W	933	6341
TC -15°C	W	768	5222